

APEL/I

Pressore liscio a sfera e molla
Smooth ball spring plunger
Presor liso a esfera y resorte




Materiale

Corpo, sfera e molla in acciaio inox AISI 303.

Stainless steel body, ball and spring (AISI 303).

Cuerpo, esfera y resorte de acero inoxidable (AISI 303).

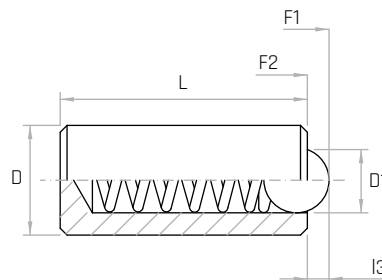

Codice	Modello	D mm	D1 mm	l3 mm	L mm	F1 N	F2 N	Peso gr.
7747180	APEL/7I	3	2	0,65	7	4,5	7,5	0,3
7747181	APEL/9I	3,5	2,5	0,8	9	6	14,5	0,6
7747182	APEL/11I	4	3	0,9	11	8	14,5	0,8
7747183	APEL/12I	4,5	3,2	0,95	12	9,5	16,5	1,1
7747184	APEL/13I	5	3,5	1,0	13	11	18	1,5
7747185	APEL/14I	5,5	4	1,2	14	15,5	25	1,9
7747186	APEL/15I	6	4,5	1,5	15	18	31	2,3

NOTE: F1: Pressione molla precarico. F2: Pressione molla carico max.

F1: Spring pressure preload. F2: Spring pressure max load.

F1: Presión de resorte precarga. F2: Presión de resorte carga máxima.