

## ASMM

### Descrizione

**Perno in acciaio zincato filettato.**

Threaded zinc plated steel stud.

Perno de acero galvanizado roscado.

**Antivibrante sgolato**

**Concave anti-vibration**

**Antivibrante cóncavo**




### Materiale

**Gomma naturale nera, durezza 60±5 Shore A.**

Black natural rubber, hardness 60±5 Shore A.

Goma natural negra, dureza de 60±5 Shore A.

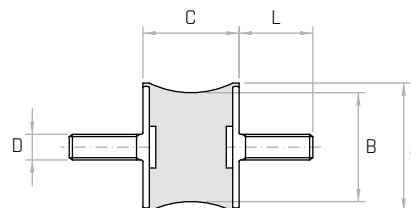

| Codice  | Modello              | A<br>mm | B<br>mm | C<br>mm | D         | L<br>mm | Carico Statico<br>a compressione | Carico statico<br>massimo |
|---------|----------------------|---------|---------|---------|-----------|---------|----------------------------------|---------------------------|
|         |                      |         |         |         |           |         | Kg.                              | Kg.                       |
| 7330251 | <b>ASMM/25x20x10</b> | 25      | 20      | 10      | <b>M6</b> | 14      | 8                                | 3                         |
| 7330254 | <b>ASMM/40x30x19</b> | 40      | 30      | 19      | <b>M8</b> | 20      | 15                               | 5                         |
| 7330257 | <b>ASMM/40x30x27</b> | 40      | 30      | 27      | <b>M8</b> | 20      | 25                               | 7                         |

**NOTE:** Si forniscono, per quantità adeguate, durezze minori o superiori a 60 Shore A e inserti a misura.

For certain quantities, it can be supplied with a hardness higher or lower than 60 shore A and with inserts of different measures.

Por cantidad apropiada disponible también con dureza superior o inferior a 60 shore A y con insertos de distintas medidas.