

PRSTX/25

Piede snodato
Articulated foot / Pie articulado



Descrizione

Perno a sfera in acciaio inox AISI 304.

Spherical stainless steel stud (AISI 304).


Perno esférico de acero inoxidable (AISI 304).

Materiale

Base in tecnopolimero nero, rinforzato con fibre di vetro, finitura opaca.

Black thermoplastic, glass fiber reinforced base, mat.

Base de termoplástico negro reforzado con fibra de vidrio, acabado mate.

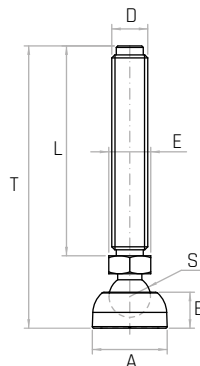

Codice	Modello	A mm	D	L mm	B mm	S mm	E mm	T mm	Peso gr.	Carico statico
6325010	PRSTX/25 M8x45	25	M8	45	12	13,8	14	68,5	35	4000
6325015	PRSTX/25 M8x70	25	M8	70	12	13,8	14	93,5	42	4000
6325025	PRSTX/25 M10x45	25	M10	45	12	13,8	14	68,5	42	5000
6325030	PRSTX/25 M10x70	25	M10	70	12	13,8	14	93,5	57	5000
6325035	PRSTX/25 M10x100	25	M10	100	12	13,8	14	123,5	73	5000
6325045	PRSTX/25 M12x45	25	M12	45	12	13,8	14	68,5	54	5000
6325050	PRSTX/25 M12x70	25	M12	70	12	13,8	14	93,5	73	5000
6325055	PRSTX/25 M12x100	25	M12	100	12	13,8	14	123,5	90	5000
6325060	PRSTX/25 M12x125	25	M12	125	12	13,8	14	148,5	114	5000
6325070	PRSTX/25 M14x75	25	M14	75	12	13,8	16	100,5	102	5000
6325080	PRSTX/25 M16x60	25	M16	60	12	13,8	16	85,5	104	5000
6325085	PRSTX/25 M16x110	25	M16	110	12	13,8	16	135,5	171	5000
6325090	PRSTX/25 M16x145	25	M16	145	12	13,8	16	170,5	218	5000
6325095	PRSTX/25 M16x175	25	M16	175	12	13,8	16	200,5	259	5000

NOTE: Base e perno forniti smontati.

Base and stud supplied disassembled.

Base y perno proporcionados desmontados.