

PRST/25

Piede snodato
Articulated foot / Pie articulado




Descrizione

Perno a sfera in acciaio zincato.
 Spherical zinc plated steel stud.
 Perno esférico de acero galvanizado.

Materiale

Base in tecnopolimero nero, rinforzato con fibre di vetro, finitura opaca.
 Black thermoplastic, glass fiber reinforced base, mat.
 Base de termoplástico negro reforzado con fibra de vidrio, acabado mate.

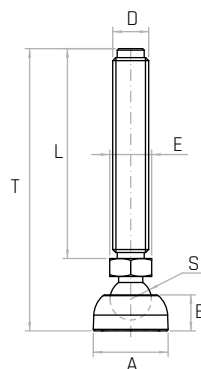

Codice	Modello	A mm	D	L mm	B mm	S mm	E mm	T mm	Peso gr.	Carico statico
6322010	PRST/25 M8x45	25	M8	45	12	13,8	14	68,5	35	4000
6322015	PRST/25 M8x70	25	M8	70	12	13,8	14	93,5	42	4000
6322025	PRST/25 M10x45	25	M10	45	12	13,8	14	68,5	42	5000
6322030	PRST/25 M10x70	25	M10	70	12	13,8	14	93,5	57	5000
6322035	PRST/25 M10x100	25	M10	100	12	13,8	14	123,5	73	5000
6322045	PRST/25 M12x45	25	M12	45	12	13,8	14	68,5	54	5000
6322050	PRST/25 M12x70	25	M12	70	12	13,8	14	93,5	73	5000
6322055	PRST/25 M12x100	25	M12	100	12	13,8	14	123,5	90	5000
6322060	PRST/25 M12x125	25	M12	125	12	13,8	14	148,5	114	5000
6322070	PRST/25 M14x75	25	M14	75	12	13,8	16	100,5	102	5000
6322080	PRST/25 M16x60	25	M16	60	12	13,8	16	85,5	104	5000
6322085	PRST/25 M16x110	25	M16	110	12	13,8	16	135,5	171	5000
6322090	PRST/25 M16x145	25	M16	145	12	13,8	16	170,5	218	5000
6322095	PRST/25 M16x175	25	M16	175	12	13,8	16	200,5	259	5000

NOTE: Base e perno forniti smontati.
 Base and stud supplied disassembled.
 Base y perno proporcionados desmontados.